

FIG. 1


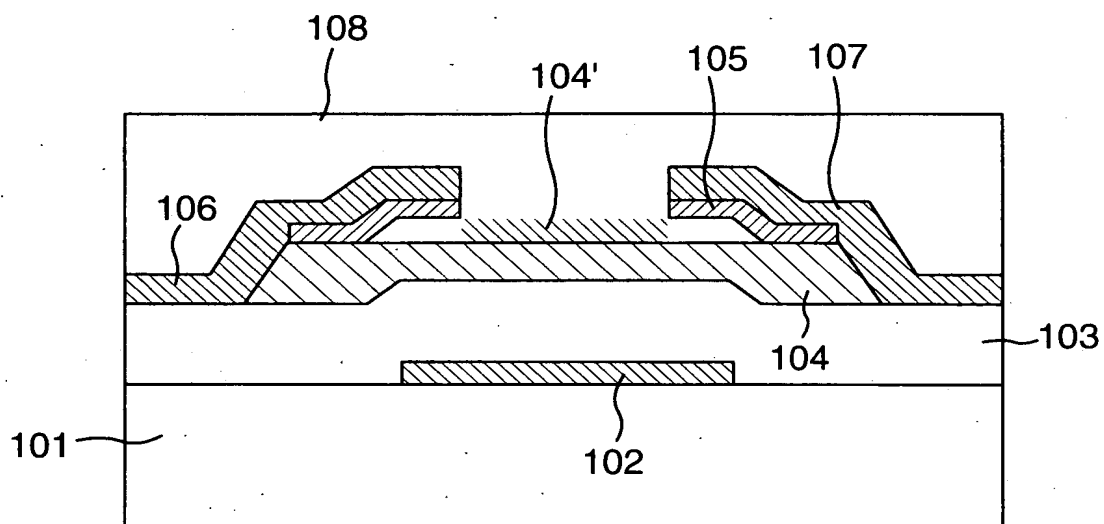


FIG. 2

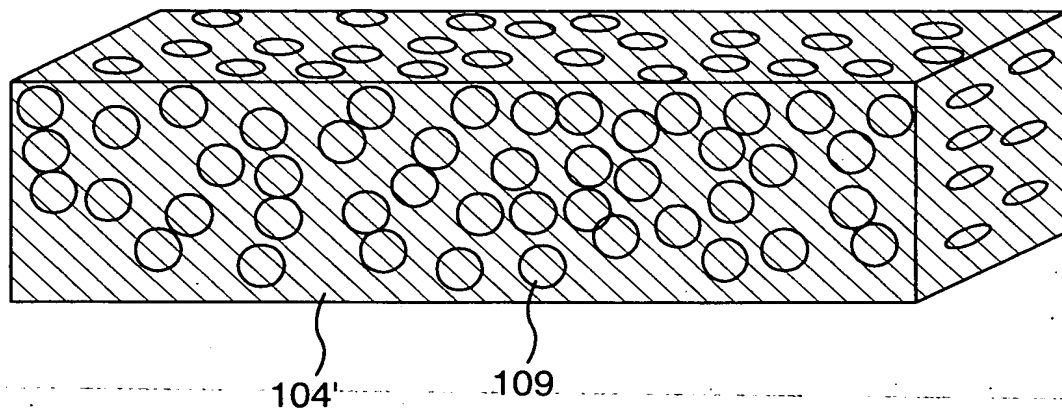

CURRENT VALUE RATIO BETWEEN SOURCE AND  
DRAIN IN THE CASE OF BACK GATE ELECTRODE  
VOLTAGE OF 40V AND IN THE CASE OF PROVIDING  
NO BACK GATE ELECTRODE

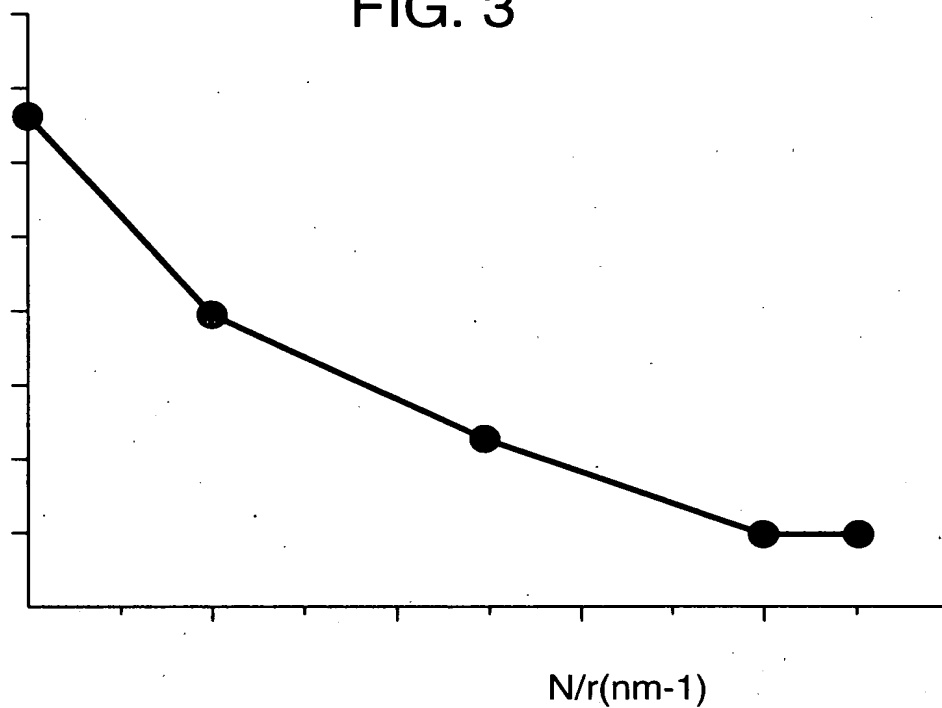


FIG. 6



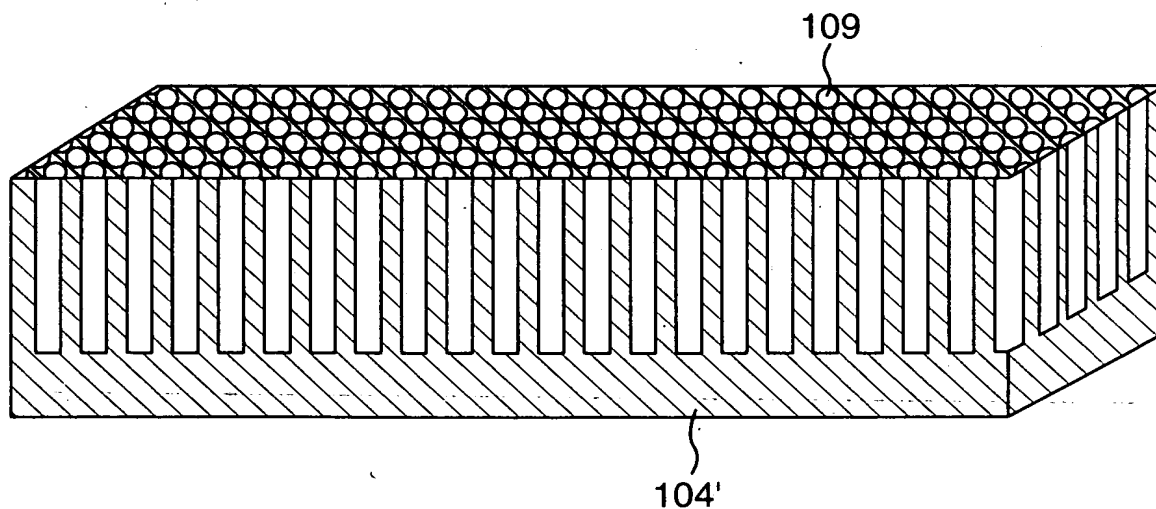


FIG. 4

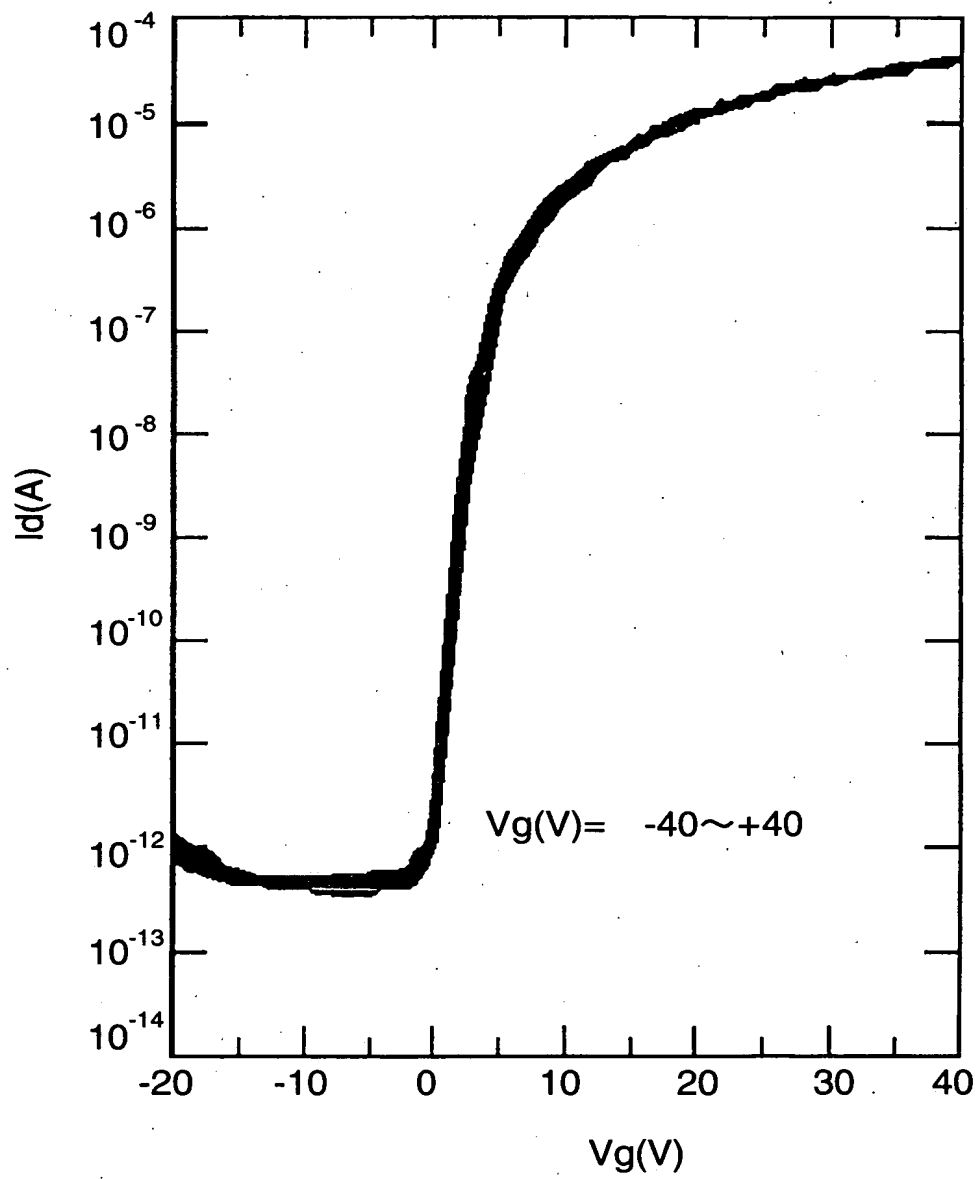


TOO2807 52807660

FIG. 5

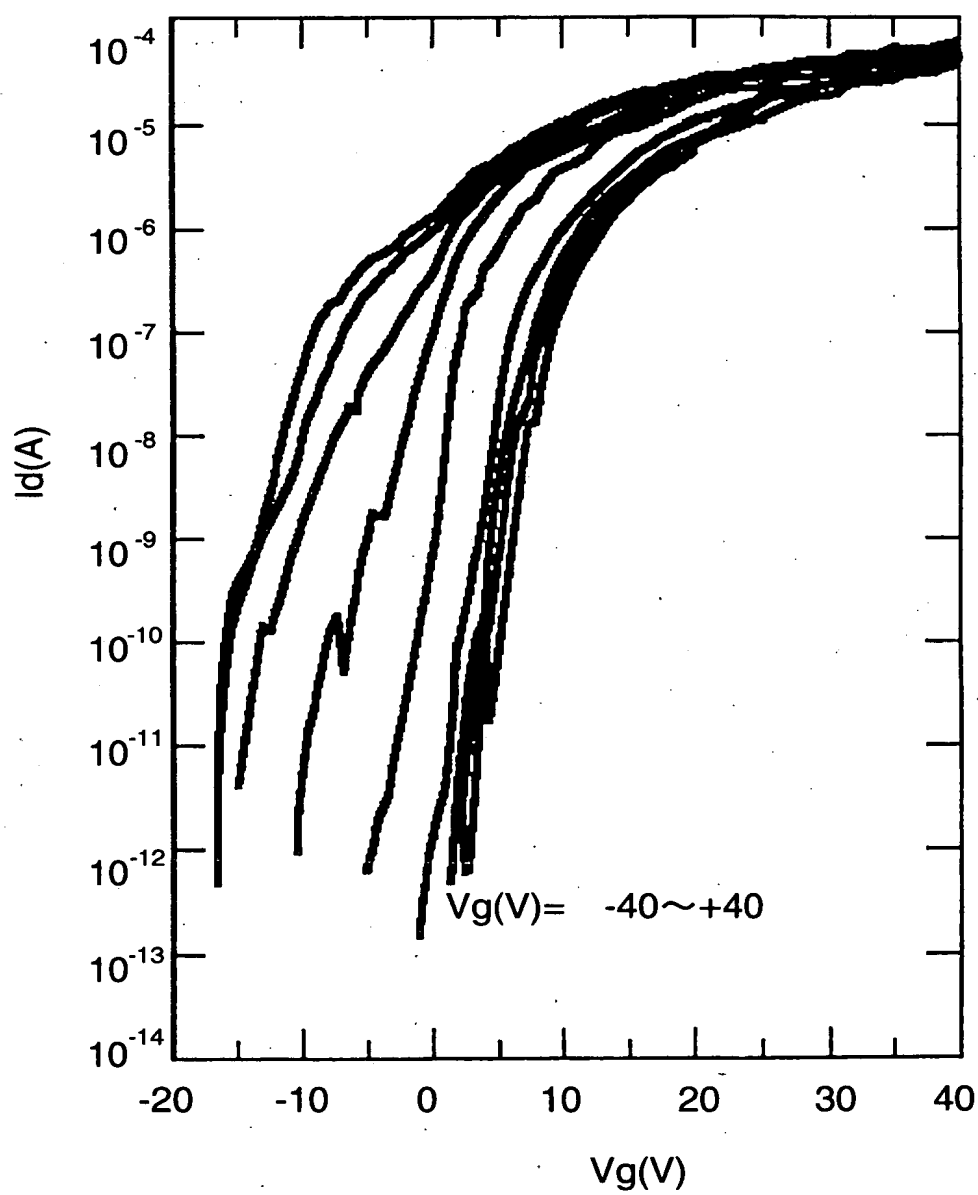

# FIG. 7

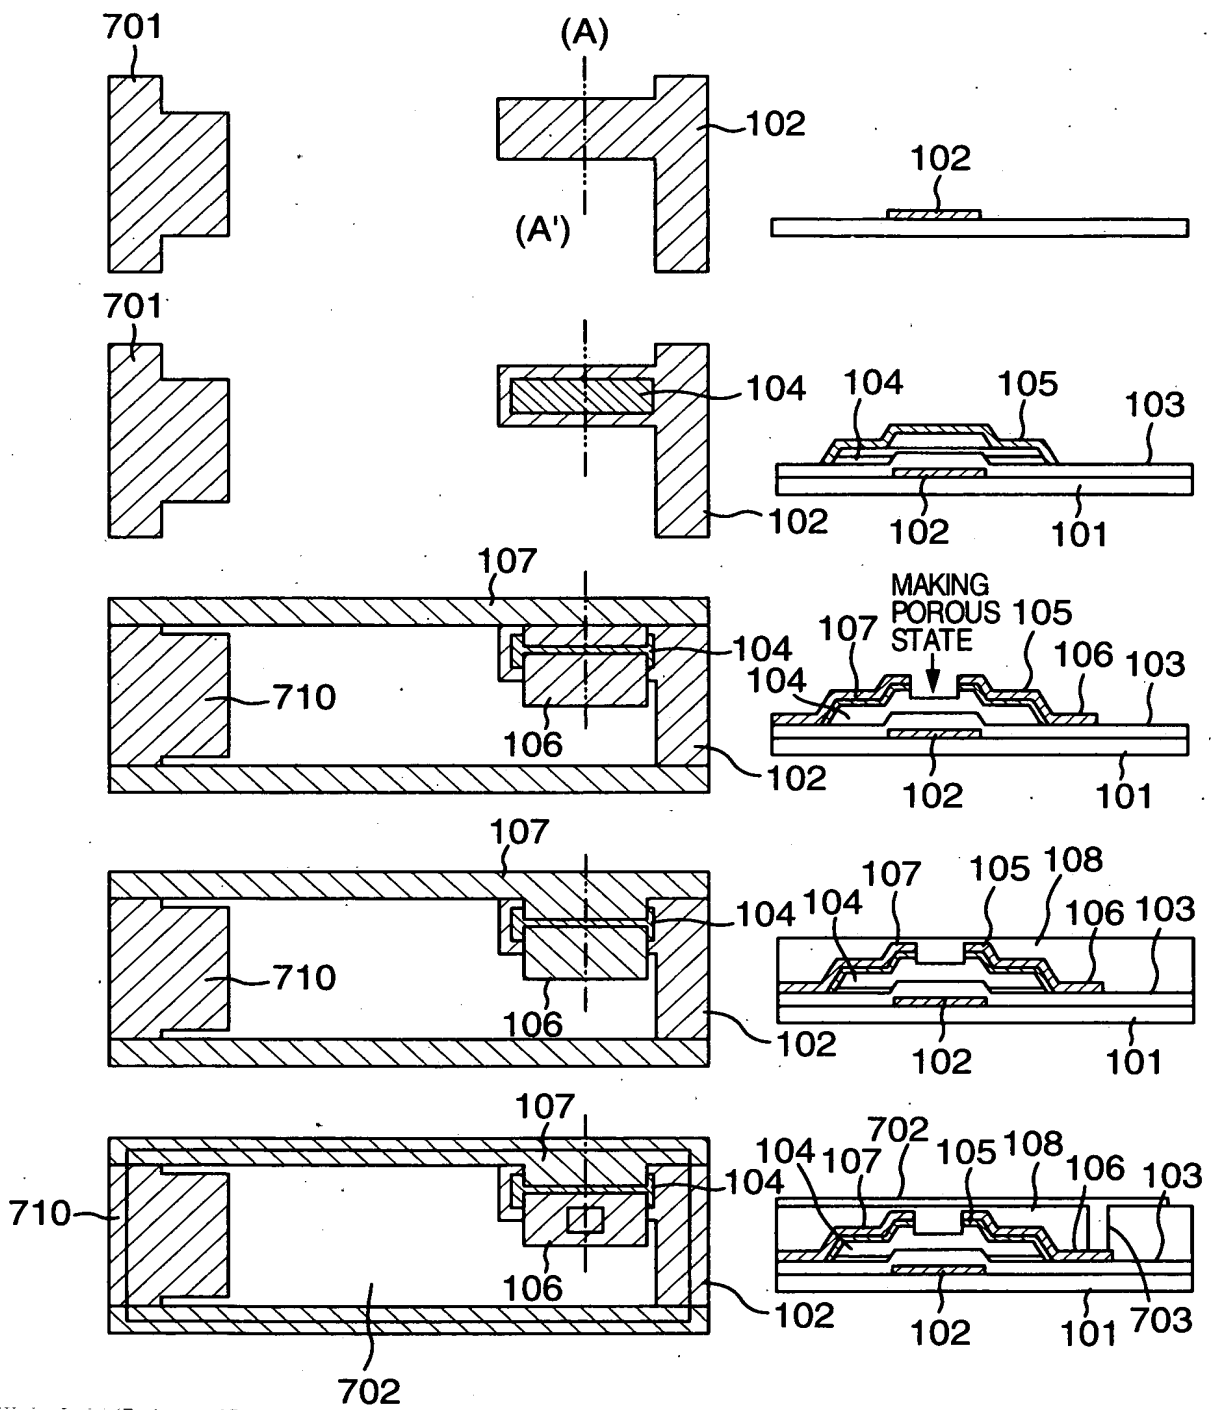

# FIG. 8

